



Innovative


Solutions in Touch Screen Technology

ULTRA Resistive Touch Screens

Glass/Film/Glass (GFG), 4/8/5-Wire Touch Sensors

Key Features

- ◆ Finger / stylus / glove operation
- ◆ Waterproof operation
- ◆ Chemical resistant
- ◆ Scratch resistant
- ◆ Hardness 6.5 Mohs
- ◆ Over 200 million touches*
- ◆ Extended operational temperature range
- ◆ 3.5" to 24" sensors

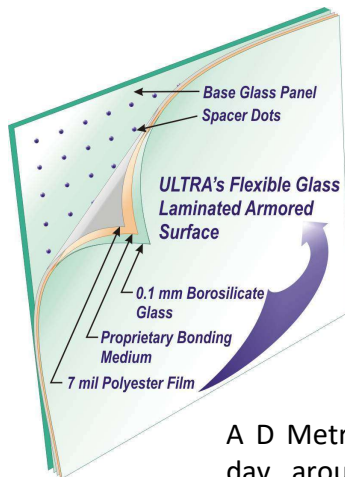

ULTRA is A D Metro's line of durable resistive touchscreen sensors. Our patented thin-glass lamination process provides a flexible pressure activated membrane forming a Glass/Film/Glass (GFG) resistive touchscreen solution that offers un-paralleled performance characteristics. A solution that combines the operational advantages of a resistive sensor with the durability of a glass surface.

Why buy a regular resistive touch sensor, when you can have the benefits of ULTRA?

A D Metro has been manufacturing GFG sensors since 2007. Every day, around the world, millions of people use ULTRA touchscreen sensors. While others have attempted to imitate ULTRA, none have been able to replicate its results for reliability and functionality.

Benefits

- ◆ Longer life cycle
- ◆ Less maintenance
- ◆ Improved ROI

The features of ULTRA touchscreen sensors include:

- ◆ Operation by any stylus or finger, and with medical, military, or heavy industrial gloves
- ◆ Highly durable screen, scratch resistant and impervious to water and most chemicals
- ◆ Operation unaffected by high levels of water, chemicals, dust, dirt or insects on the screen
- ◆ Sensor surface compatibility with NEMA 4, 6, and 12, and IP65 and IP67 enclosures.
- ◆ Extended operational temperature range
- ◆ Enhanced operational life cycle
- ◆ Minimal electromagnetic interference (EMI) and susceptibility

Applications

- ◆ Military
- ◆ Aerospace
- ◆ Industrial
- ◆ Healthcare
- ◆ Kiosks
- ◆ Point of Sale
- ◆ Mobile/ PDA
- ◆ Marine

A D Metro's ULTRA is the most cost-effective, reliable and durable resistive touchscreen sensor on the market. It enables intuitive, flexible and interactive touchscreen based applications to be used in the most demanding and extreme environments, that require durable and rugged solutions. ULTRA is ideal for OEMs and systems integrators, where it has been embedded in a diverse range of commercial, industrial and military applications.

ULTRA ...the Most Cost Effective Durable Resistive Touch Screen



* Applies to 5-wire sensor, certain conditions apply

ULTRA Resistive Touch Sensors

Mechanical Specifications

Construction Glass/Film/Glass, 3.5" to 24"
Surface borosilicate glass thickness..... 0.1mm
Indium tin oxide (ITO)-coated substrate thickness 1.1mm-3.0mm
PET film Clear or Standard Anti-glare
Cable design | termination FFC, FPC | ZIF, AMP
Input method Finger, Stylus, Glove
Activation force 80g typical
Surface hardness 6.5 Mohs
Sensor lifespan (touches) >200 million (5-wire); >20 million (4/8-wire)
Sensor surface enclosure compatibility NEMA 4, 6, 12; IP65, IP67
Fire/burn resistance Open flame, sparks, cigarette burns
Chemical resistance ASTM D1308-87, ASTM F1598-95
(E.g. acetone, methylene chloride, methyl ethyl ketone, isopropyl alcohol, hexane, turpentine, gasoline, diesel fuel, motor oil, transmission fluid, antifreeze, ammonia-based glass cleaner, cleaners, coffee, grease, salt, etc.)

Optical Specifications

Light transmission Clear: 88%; Standard: 84%
Gloss of front glass Clear: 170-180 GU | Anti-glare: 50-60 GU
Anti-reflection SAE AMS-2521 & MIL-C-675

Environmental Specifications

Operating temperature -35oC to +80oC*
Storage temperature -40oC to +85oC*
Relative humidity 90% at 60oC up to 240 hrs
Altitude 10,000ft / 3,048km

Electrical Specifications

Insulation resistance 20MΩ @ 25V DC
Linearity (5-wire, active area, post calibration) <1.5%
Contact bounce <15ms
Operating voltage <5V
Contact current 70mA (max)
Corner to corner resistance (5-wire) 40-60Ω (typical)
Bar to bar resistance (4/8-wire) 200-800Ω (typical)
Electrostatic discharge EN 61000-4-2 (1995) 20 x 15kV
Designed in compliance with EN 60950, UL 60950, UL 544
Controller options See controller datasheets



WARNING: These sensors can expose you to chemicals including Indium Tin Oxide which is known to the State of California to cause cancer.
For more information, visit www.P65Warnings.ca.gov.

Sensor Enhancement Options

A D Metro's standard ULTRA resistive touch screen sensor technology offers the most cost-effective durable solution for many applications. We also offer custom enhancement options to meet the requirements of demanding applications e.g. military, avionics and vandal proof kiosks:

Optical Enhancements

- ◆ Anti-reflective coating—AR
- ◆ Anti-glare matte finish—AG / Anti-Newton Ring
- ◆ Anisotropic film for use with polarized glasses

Mechanical Enhancements

- ◆ Chemically strengthened glass lamination
- ◆ Substrate options: 1.1, 1.6, 2.0 & 3.0mm
- ◆ Surface borosilicate glass options: 0.1, 0.145, & 0.2mm

EMI shielding

- ◆ ITO coatings (4 ohm/sq, 13 ohm/sq standard)
- ◆ Military grade Micro Mesh/Laser Mesh/Wire Mesh
- ◆ Various grounding options


Miscellaneous

- ◆ Infra-red reflection coatings and films
- ◆ Application of NVIS compliant filters
- ◆ Mullion heaters for extreme conditions
- ◆ Neoprene/Poron foam and/or adhesive mounting gaskets
- ◆ Custom tail assemblies
- ◆ Silk screened borders and die-cut vinyl overlays
- ◆ Vented or pressure Compensated Resistive diaphragm
- ◆ Elo Touch & 3M Touch type connector pinouts

Regulatory

UL, RoHS3 Compliant, REACH Unaffected
CE/FCC Part 15 Class B Unintentional Radiation Compliant
MIL-STD-461G, MIL-STD-464D & MIL-DTL-901E Compatible *

* When installed as per A D Metro recommendations

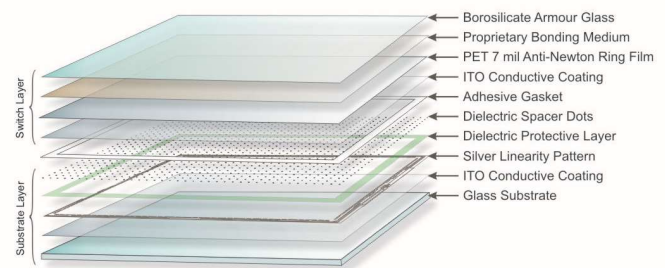

1390 Star Top Rd.
Ottawa, ON, Canada K1B 4V7



Disclaimer: Technical specifications are provided for guidance and subject to change without notice. Specifications and performance may depend on sensor dimensions, selected options, installation and mounting. Please contact A D Metro for confirmation of the applicable specifications, individual sensor drawings, as well as installation and mounting best practices.

ABOUT US:

Established in 1988, A D Metro designs, manufactures and supplies innovative touch screen technology solutions for original equipment manufacturers (OEMs), system integrators and value added resellers. Everyday A D Metro's products are touched by millions of people around the world. Our ULTRA product line is the most durable resistive touch screen sensor available on the market and our projected capacitive (PCAP) touch screen solutions simplify design and accelerate time to market.

Contact us, for more information on our innovative touch screen products, enhancements and custom manufacturing solutions.